

NEXi-IND-Pro/4PoE

MAIN FEATURES:

- 9th Gen Intel® Core™ i5-9500TE CPU
- 16GB RAM
- 128GB SSD for OS (Linux)
- 2 x 2.5" HDD Bays (**DB-SSD PRO 1/2/4TB**)
- 1 x HDMI & 1 x Display Port
- 2 x Ethernet Ports
- 4 x PoE+ up to total 60W
- 2 x SIM slots
- WiFi/BT optional
- 24V DC only
- Operating temperature up to 60°C
- IP40
- Powered by AXIOMTEK eBOX671



REAR



FRONT


SPECIFICATIONS:

SYSTEM	CPU	Intel® Core™ i5-9500TE CPU
	TDP	35W
	# of Cores	6
	Base Freq.	2.2 GHz
	Max Turbo Freq.	3.6 GHz
	Memory	1 x DDR4-2666 SO-DIMM, 16GB
EXTERNAL INTERFACES	Display	1 x HDMI 1.4, supports up to 4096 x 2160 @ 24 Hz 1 x DP 1.2a, supports up to 4096 x 2160 @ 60 Hz
	Ethernet	2 x 10/100/1000 Mbps 4 x PoE+ RJ45
	USB	6 x USB 3.2 Gen 2, type A
	COM	2 x RS232/422/485
	GPIO	1 x 8bit GPIO, DB9
STORAGE	SATA	2 x 2.5" HDD drive bay (up to 9.5 mm height)
	mSATA	1 x mSATA 128GB
EXPANSION SLOT	Extension	2 x PCIe Mini Slot (supports BT/Wi-Fi module/ Google TPU module)
	SIM	2 x nano-SIM slot
POWER	Power Input	24 V DC, 2-pin terminal block
MECHANICAL	Mounting	Wall-mount/ DIN Rail mount
	Dimensions (mm)	280 (11.02") (W) x 210 (8.26") (D) x 80.5 (3.16") (H)
	Weight	4.8 kg (10.58 lb)/5.6 kg (12.34 lb)
ENVIRONMENT	Operating Temp.	-20~60°C with wide temperature parts, fanless
	Storage Temp.	-40~85°C
	Relative Humidity	10 to 95% (non-condensing)
	EMC	CE (ITE), FCC , VCCI, BSMI, RCM,KCC
	Safety	UL,CB, CCC, BSMI, CE
	Vibration	Operating: 0.21Grms, 5~500 Hz, 20min duration
	Shock	Operating: 50 G, half sine 11ms duration
Green	GA (RoHS)	
SECURITY	TPM	TPM v2.0
OPERATING SYSTEM	Watch Dog Timer	255 levels, 1 to 255 sec.
	Operating System	Ubuntu

© 2023 EOS Australia PTY LTD. The exclusive distributor of NEXi Server. Specifications and price are subject to change without prior notice. All rights reserved.

NEXi-IND-Pro/4PoE

SYSTEM OUTLETS:

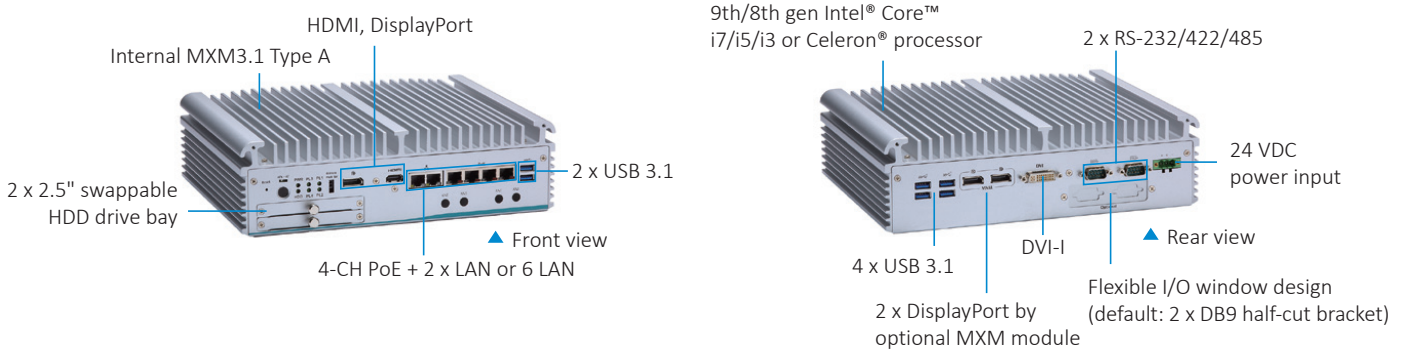

DIMENSIONS (mm):

