

Spec sheet

Ref: Art 7/G+ PCM

Description

Art 7/G+ PCM video monitor, is a TCP/IP solution device, for the communication in luxury homes, residential buildings, condominiums or office buildings.

Thanks to its technology and Peer2Peer facilities Art 7/G+ PCM monitors do not require any server on the installation. The protocol of communication is TCP/IP which makes possible to be connected to a LAN together with other IP devices in the same installation.

The system never becomes busy thanks to the multi-channel feature. The touch capacitive screen displaying big icons makes it user-friendly, specially for elderly or disabled people.

Features

- Missed calls image memory: 100 pics.
- Text messages between apartments.
- Intercommunication between apartments.
- Short-cut list of intercom apartments.
- Selective call to concierge stations.
- Self-activation of door entry panels.
- Voice mail-box service.
- Communication and ring tone adjustments.
- Track up to 32 ONVIF Cameras.
- Door Bell input tone. Dry contact integrated.
- Output for call signal repeat.
- PCM/G+ 4 wires input.
- 4 Alarm zones inputs. Alarms reported to guard.
- 12Vdc alarm output.
- Emergency texts from guard units.
- Connector RJ-45 fast and secure installation.
- 18Vdc PoE.

Technical details

Resolution: 800 x 480 px.
 Video coding: H.264.
 Operative system: Linux.
 Power consumption: max. 500mA. Idle 90mA.
 Working temperature: -10° to 60°
 Humidity: 10% - 90% non condensing.
 Voltage: 18Vdc PoE. Requires specific switches.
 Construction: ABS plastic and glass.
 Touch screen: Full capacitive.

Options




SOB-M
Desktop adaptor



Dimensions: 222(W) 154 (H) 20 (D) mm

Diagram

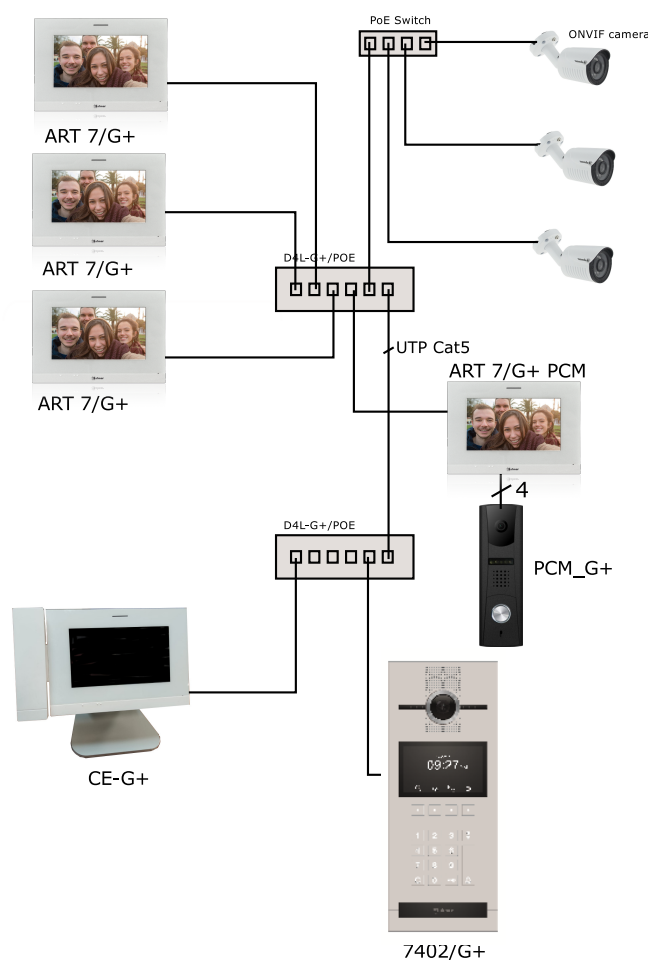

For further information download the instructions manual.

Due to continuous product improvement, all colors, sizes, materials, finishes and specifications are subject to change without notice.